

Introducing the Autobag® PaceSetter PS 125™ Tabletop Baggers — The Ultimate in Hand Load Packaging Systems



The Autobag® PaceSetter PS 125™ and PS 125 OneStep™ Tabletop Baggers are specifically designed to bring simplicity, versatility, quality and value to hand load packaging applications. Operating at speeds up to 25 bags per minute (15 BPM OneStep version), the PS 125 bagging systems offer innovative engineering in a simple, tabletop design. The PS 125 features a small footprint of 550mm x 480mm, and weighs just 37Kg. The quiet, all-electric design does not require compressed air to run, making the unit highly adaptable in any low- to mid-volume production environment.

The PS 125 is simple to operate, with a user-friendly operating parameters, job set-up, job storage, and on-board system diagnostics. The unique, locking turntable combines with the AutoThread™ feature to

provide ergonomic handling and changeover of Autobag bags-on-a-roll. Bags are automatically indexed, loaded by hand, then sealed using the Push-to-Seal™ function, a standard footswitch or via automatic cycle control.

The PaceSetter PS 125 OneStep™ includes the same conveniences of the standard PS 125 with the addition of a built-in PH 412 imprinter. Featuring next-bag-out printing technology that is ideal for short run and order fulfillment applications, the PS 125 OneStep is capable of printing high resolution graphics, text and bar codes directly on the bag, eliminating the need for a separate labeling operation. The printer features a tilt-back print head for easy maintenance, and the optional AutoLabel™ label design software simplifies label creation.

Using system-matched Autobag pre-opened bags-on-a-roll in sizes up to 265mm wide and 430mm long, the PaceSetter PS 125 and PS 125 OneStep offer a simple and cost effective packaging solution.

BPM

20

25

30

40

50


60

70

80



PART NO. 35



User Benefits

- All-electric system does not require compressed air to run
- Compact design is ideal for low- to mid-volume packaging operations
- Locking turntable and AutoThread features provide easy bag access and changeover
- Open loading area and controlled seal bar maximize loading flexibility and operator safety
- Automatic or manual operating modes for optimum flexibility and productivity
- Stores jobs for later recall using operator-friendly controls
- On-board system diagnostics simplify maintenance and maximize productivity
- Next-bag-out printing feature ensures greater accuracy and eliminates product queuing in order fulfillment applications*
- Capable of printing high resolution graphics, text and bar codes directly on the bag*
- Tilt-back printer head for easy maintenance*

*PS 125 OneStep version only



Standard Features

- Two configurations available: PS 125™ (without printer) or PS 125 OneStep™ (with printer)
- Small footprint, 550mm x 480mm, frees up valuable tabletop space
- Locking turntable for ergonomic and rapid access to Autobag® bags-on-a-roll
- Operator-friendly control panel, bright VF display and easy-to-navigate menu structure
- Stores up to 10 jobs in memory for rapid recall
- Automatic bag sealing and indexing, Push-to-Seal™ or standard footswitch operation
- AutoThread™ feature for easy bag changeovers
- Multi-position bag support shelf for flexibility
- Dancer assembly for positive bag-web control provides accurate positioning for inline printing*, loading and sealing
- Multiple ports for enhanced printer communications: USB, Serial, Parallel and Ethernet*
- Tilt-back printer head for easy maintenance*

Typical Applications

- Automotive & appliance parts
- Hardware & DIY
- Electrical & electronic
- Plumbing & heating
- Hobby & craft
- Jewellery & novelty items
- Cosmetics & beauty aids
- Disposable health care
- Mail order fulfillment



Configuration Options
 Use the simple Push-to-Seal™ mode or choose the standard footswitch which allows for hands-free bag sealing.


Options

- Bag deflators
- Simple funnels
- AutoLabel™ Designer software*
- Basic Spare Parts Kit

Technical Specifications

PS 125	
Weight:	37 kg
Electrical:	110/220 VAC; 50/60 Hz; 5.0/2.7 Amps
Pass-Through:	Up to 86mm
Bag Thickness:	35-100 microns
Bag Sizes:	W50mm to 265mm L100mm to 430mm
Max Product Weight:	11kg
Dimensions:	

PS 125 OneStep	
Weight:	50 kg
Electrical:	110/220 VAC; 50/60 Hz; 5.0/2.7 Amps
Pass-Through:	Up to 86mm.
Bag Thickness:	35-100 microns
Bag Sizes:	W50mm to 265mm L100mm to 430mm
Max Product Weight:	11kg

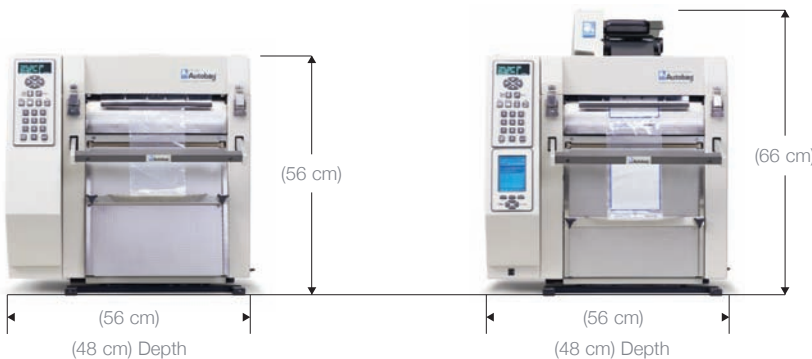

*PS 125 OneStep version only

Mechanical Features

Tilt-back printer* enables fast and easy maintenance and is system-matched for highest print quality using genuine AutoLabel™ Thermal Transfer Ribbon



Turntable design enables easy access to bags, while the AutoThread™ feature simplifies bag changeovers



Open load area and controlled seal bar maximize loading flexibility and operator safety



Automated Packaging Systems Ltd
 Engima Business Park, Sandy's Road,
 Malvern, Worcestershire, WR14 1JJ
 Tel: +44 (0)1684 891400
 Fax: +44 (0)1684 891401
 E-mail: contact@autobag.co.uk