



LOFMET™ titanium filter cartridges

Eaton's LOFMET filter cartridges are designed for a variety of applications including corrosive liquids and gases, cryogenic fluids, high viscosity solutions, process steam, high temperature liquids and gases and catalyst recovery.

The highly porous titanium filter cartridges are designed for applications with extreme operating conditions and aggressive liquids and gases. The rugged and fixed pore structure is constructed from sintered titanium powder. The result is a robust filter element that is resistant to high temperatures and pressure conditions. Cleaning and backwash cycles are repeatable. Mechanical strength and corrosion resistance are the result of a seamless construction.

Features and benefits

- High corrosion resistance
- All sintered titanium construction
- Backwashable for reuse and maximum economy
- Multiple end configurations and gasket/o-rings to fit most filter housings

Specifications

Filter material
Titanium

End caps
Titanium

Gaskets/O-rings
Silicone, EPDM, FKM, FEP/FKM (O-rings), PTFE (flat gaskets)

Retention ratings
0.50, 1, 5, 10, 15, 35 µm
@ 99.5% efficiency

Technical data

Nominal lengths
5", 9.75", 10", 20", 30", 40"
(127, 248, 254, 508, 762, 1016 mm)

Outside diameter
2.36" (60 mm)

Max. operating temperature
371°C*

Max. differential pressures
17.3 bar forward
3.5 bar reverse

EPDM: Ethylene Propylene Diene Monomer Rubber

FKM: Fluoro Rubber

FEP: Tetrafluoroethylen-Hexafluorpropylen-Copolymer

PTFE: Polytetrafluoroethylene

* Max. temperature applicable to NPT style filters only (no O-rings or gaskets). Consult Eaton for guidance on specific chemical/temperature compatibility.




Powering Business Worldwide

LOFMET filter cartridges

Flow rate*

(21°C per 10" element for water)

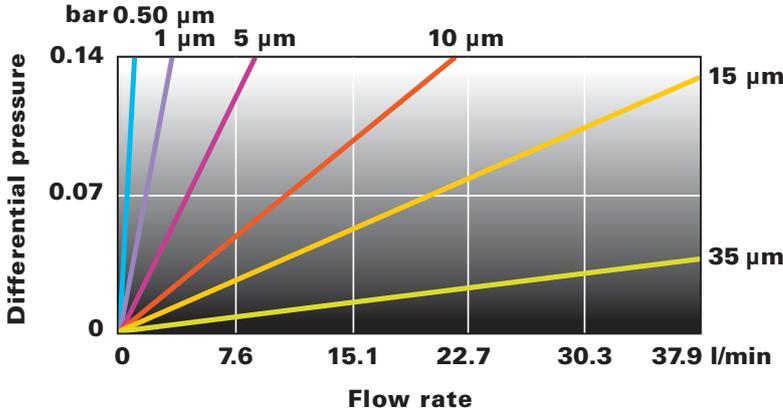

* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.


Efficiency of retention

Beta ratio retention of efficiency	Beta 200 99.5%	Beta 20 95%	Beta 10 90%
0.5 µm	0.5	0.3	0.1
1 µm	1	0.8	0.4
5 µm	5	3	1
10 µm	10	8	5
15 µm	15	12	10
35 µm	35	32	28

$$\text{Beta ratio} = \frac{\text{Upstream particle counts}}{\text{Downstream particle counts}}$$

The micron ratings shown at various efficiency and beta ratio value levels were determined through laboratory testing, and can be used as a guide for selecting cartridges and estimating their performance. Under actual field conditions, results may vary somewhat from the values shown due to the variability of filtration parameters. Testing was conducted using the single-pass test method, water at 9.45 l/min/10" cartridge. Contaminants included latex beads, coarse and fine test dust. Removal efficiencies were determined using dual laser source particle counters.

Ordering code

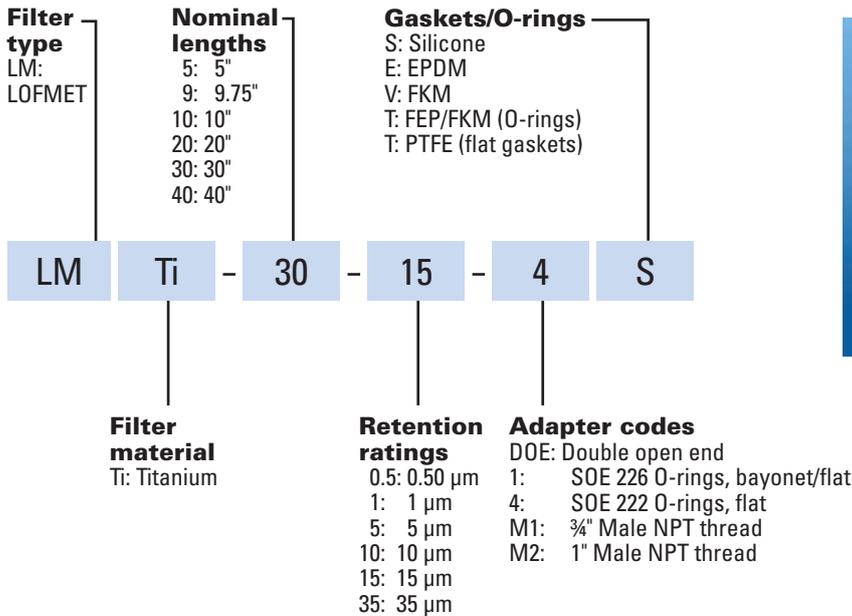

LOFMET filter cartridges are available with a variety of gasket and end cap configurations.

North America
18684 Lake Drive East
Chanhassen, MN 55317
Toll Free: +1 800-656-3344
(North America only)
Tel: +1 732-212-4700

Greater China
No. 7, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 2899-3687

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0
Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

Asia-Pacific
100G Pasir Panjang Road
#07-08 Interlocal Centre
Singapore 118523
Tel: +65 6825-1620

An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

EN
EF-LM
ISO-2024

© 2024 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

