



Graver Technologies

FILTRATION | SEPARATION | PURIFICATION



# WaterTEC™ Series Filter Cartridges

## *Absolute Rated Polyethersulfone Membrane Filter Cartridges*

### Product Specifications

**Media:** Asymmetric Polyethersulfone Membrane

**Inner core, end caps, cage:** Polypropylene

**Support layers:** Spunbonded Polypropylene

**Gaskets/O-Rings:**

Buna-N, EPDM, Silicone, Teflon Encapsulated  
Viton (O-Rings only), Teflon (gaskets), Viton

**Micron ratings:** 0.05, 0.1, 0.2, 0.45, 0.65  $\mu\text{m}$

### Dimensions

**Nominal lengths:**

5" 9.75" 10" 20" 30" 40"  
12.7 24.8 25.4 50.8 76.2 101.6 cm

**Outside diameter:** 2.7" (6.9 cm)

**Inside diameter:** 1.0" (2.54 cm)

**Surface area:** 6.0 ft<sup>2</sup> (0.56 m<sup>2</sup>) per 10" element


### Operating Parameters

**Maximum sustained operating temperature:**  
176°F (80°C) at 20 psid (1.38 bar)

**Maximum differential pressure:**  
75 psid @ 70°F (5.2 bar @ 21°C)  
30 psid @ 176°F (2.0 bar @ 80°C)

**Maximum reverse differential pressure:**  
40 psid @ 70°F (2.8 bar @ 21°C)

**Recommended change-out pressure:**  
35 psid (2.4 bar)

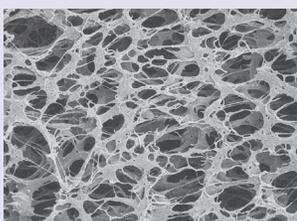

The WaterTEC filter series is constructed of absolute rated, hydrophilic, asymmetric polyethersulfone membrane and polypropylene components. The filter is designed for overall filtration economy and provides excellent flow rates and throughputs.

### FEATURES & BENEFITS

- Low pressure drop reduces energy costs
- High dirt holding capacity minimizes change-outs and down time
- All thermal bonded construction with no adhesives
- Available in all common configurations to allow use of existing filter housings
- Cost-effective absolute filtration

### CERTIFICATIONS

- USP Class VI: Meets USP Class VI Biological Test for Plastics
- FDA Listed Materials: All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, 177.1520, and 177.2440 as applicable for food and beverage contact.
- European Directive for Food Contact: European Regulation No. 1935/2004 and European Regulation 10/2011: Tested for migration behavior and is suitable for contact with all kinds of foodstuffs with minimal rinse-up. Data available upon request.

### TYPICAL APPLICATIONS

- General water filtration
- DI water post filter
- DI water prefilter
- Aqueous based chemical processing

## PERFORMANCE SPECIFICATIONS

- Cleaning/Sanitization: Compatible with most common chemical cleaning, sanitizing and sterilizing agents and with pH range from 1–14. Consult factory for specific compatibility information.
- Steam/Autoclave: Cartridges may be autoclaved for 30 minutes at 250 °F (121°C) under no end load conditions. Cartridges fitted with steam insert may be steamed for at least 10 thirty-minute cycles @ 275°F (135°C) not to exceed 3 psid (0.21 bar).


## WATERTEC NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)		Nominal Length (inches)		End Configuration		Gasket or O-Ring		Options
WaterTEC Series	0.05	0.45	-5	-20	P	Double Open End	B	Buna-N	-I End Cap Insert -R Factory Pre-Rinse
	0.1	0.65	-9.75*	-30	P2	226/Flat Single Open End	E	EPDM	
	0.2		-10	-40	P3	222/Flat Single Open End	S	Silicone	
					P7	226/Fin Single Open End	T	Teflon encap. Viton (O-Rings only)	
					P8	222/Fin Single Open End	T	Teflon (gaskets)	
<b>Example: WaterTEC 0.2-10P2E-R</b>					AM	Single Open End, Internal O-Ring	T	Teflon (gaskets)	
WaterTEC	0.2		-10		NPC	Double Open End, Internal O-Ring	V	Viton	
WaterTEC	0.2		-10		P2		E		-R

\*Available only for DOE (P) configuration

## WATERTEC FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature (per 10" cartridge)

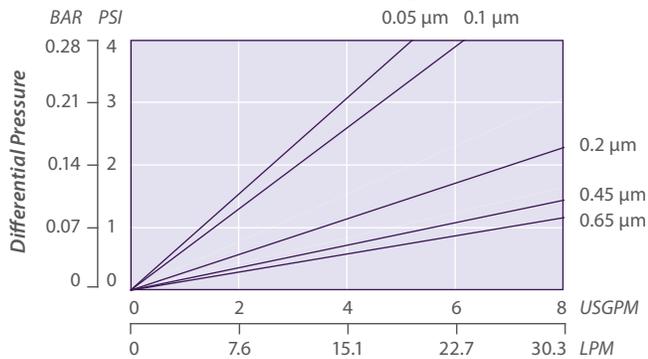

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

### FOR MORE INFORMATION

GTX-258 3-19

### DISTRIBUTED BY

Customer Service/Technical Support: 1-888-353-0303

Europe (UK): +44-1424-777791 | China: +86-21-5238-6576

Asia: +65 9671 9966

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believe to be reliable. However, It is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. WaterTec is a trademark of Graver Technologies, LLC.



Graver Technologies | 200 Lake Drive, Glasgow, DE 19702 | 302-731-1700 | 800-249-1990  
Fax: 1-302-369-0938 | info@gravertech.com | www.gravertech.com

A member of The Marmon Group—A Berkshire Hathaway Company