

SE 202-MS Conductivity Sensor

2-electrode conductivity sensor with stainless steel body, digital, with Memosens technology

Digital 2-electrode sensor for low to ultra low conductivity.

Contactless, digital Memosens technology offers significant advantages with regard to handling and measurement reliability. The sensor head saves calibration data, operating time and the sensor designation and serial number.

Applications

Measurement in media with low conductivity such as ultrapure water/ boiler feedwater and demineralized or ion-exchanged water.


Facts and Features

- Perfect galvanic isolation thanks to Memosens technology
- No influence of humidity in the connector
- Can be precalibrated
- Digital data transfer
- Integrated sensor diagnostics
- Integrated temperature detector
- Stainless steel 1.4571 body

Specifications

Conductivity:	0 ... 200 $\mu\text{S}/\text{cm}$
Resolution:	0.01 $\mu\text{S}/\text{cm}$
Cell constant:	0.1 cm^{-1}
Temperature:	23 ... 176 °F (-5 ... 80 °C)
Pressure:	1 bar (relative)
Temperature detector:	NTC 30 k Ω
Electrodes:	Coaxial arrangement, stainless steel 1.4571
Body material:	Stainless steel 1.4571
Isolator:	POM
Gasket:	Viton
Body length:	120 mm
Sensor connector:	Memosens laboratory head, for use with Portavo sensor quiver
Connector material	PPS/PVC/EPDM
Immersion depth:	Min. 35 mm

Dimension Drawing

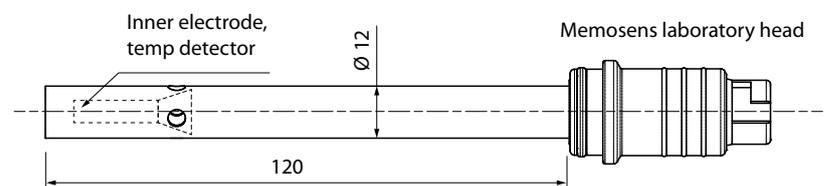

All dimensions in mm

SE 202-MS Memosens Conductivity Sensor

Product Range

Sensor	Length	Order No.
SE 202-MS conductivity sensor incl. flow cell	120 mm	SE 202-MS

Accessories	Length	Order No.
Memosens cable	1.5 m	CA/MS-001XFA-L
	2.9 m	CA/MS-003XFA-L
Flow cell (spare part)		ZU 1014

Calibration Solutions	Quantity	Order No.
Conductivity standard 1.3 µS/cm, KCl	300 ml	ZU 0701
Conductivity standard 15 µS/cm, KCl	500 ml	CS-C15K/500
Conductivity standard 147 µS/cm, KCl	500 ml	CS-C147K/500

MemoSuite	Order No.
Management software for Memosens sensors	Basic version (calibration) SW-MS1400-B
	Advanced version (calibration, diagnostics, documentation) SW-MS1400-A