




BAG STYLES:



PILLOW STYLE



PILLOW STYLE
w/ EURO SLOT

MAXIMUM SPEED:

Up to **60** cycles
per minute

MAXIMUM BAG SIZE:

200 mm x 250 mm
(7.87" x 9.84")

MINIMUM BAG SIZE:

70 mm x 80 mm
(2.75" x 3.15")

GET DOUBLE THE VALUE, EFFICIENCY, AND
RETURN ON INVESTMENT WITH OUR SLEEK
BAG-IN-BAG V/F/F/S MACHINE!



VIKING MASEK VFFS

E250

E400

ES400

M250

M250 BiB

M400

M500

M650

S250

S400

SACHET SA300-SA500

SIGMA

STICK PACK ST200-ST800

VELOCITY

FEATURES:


- Robust stainless steel frame
- Enclosed, direct drive jaw actuation
- Off-the-shelf components
- Minimal maintenance requirements
- Short film path
- Small machine footprint
- No tool changeover
- End-seal cooling air
- Self-centering pull belts
- Manual or automatic film tracking
- VFD powered film unwind
- Quick film splice table
- Product stagers
- Bag deflators
- Photo eye and encoder
- Jaw obstruction detection
- Runs most film structures
- Storage for 100 product recipes

OPTIONS:


- Siemens or Allen Bradley control platform
- Integration with variety of fillers, printers, metal detectors, label applicators, and checkweighers
- Vacuum pull belts
- Gas flush
- Static eliminator
- Tear notch
- In-feed and take-away conveyors
- Remote diagnostics

M250 BiB VIEWS:



FRONT

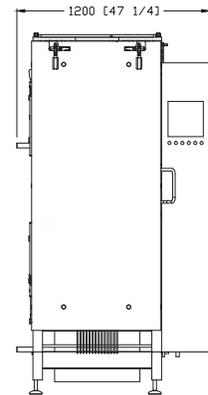

SIDE

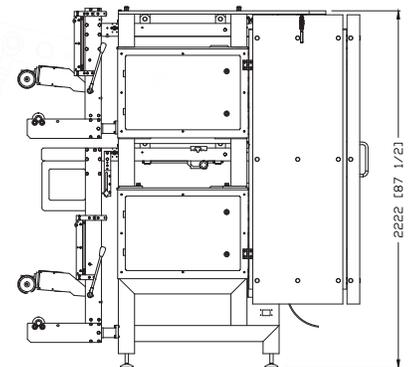

TOP

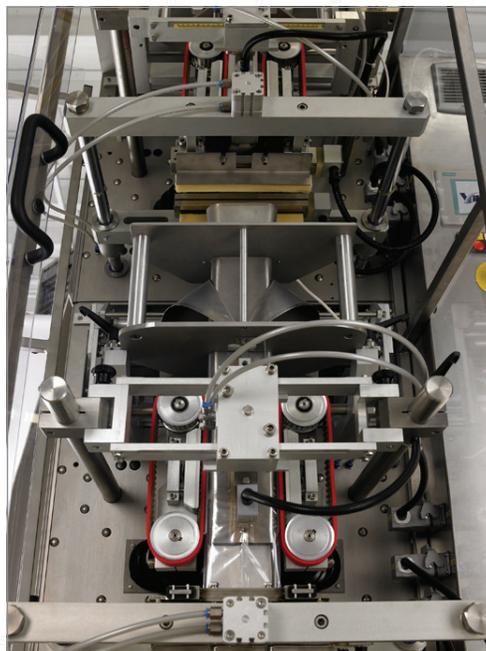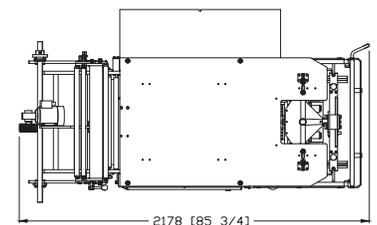

Standard views, dimensions may vary.