

CAPv 10

IP20

CE

CONVERTER



- **Universal power supply:**
20 to 250 Vac and 20 to 250 Vdc
- **Universal input:**
mA, mV, V, Pt100 3 or 4 wire, thermocouple J or K, resistance and potentiometer.
- **Supply for 2-wire sensor**
- **Isolated analog output:**
- active or passive current (0-20 mA or 4-20 mA) or voltage (0-10V).
- **Sensor break detection**
Self-zero and self-diagnosis
- **Configuration:**
A set of 8 switches located behind the front face allows selecting the input and output types and calibers, without any other setting required.

Features

- Power supply:** 20 to 250 Vac and 20 to 250 Vdc
CAPv10 Z: 24 Vdc $\pm 30\%$
- Power consumption:** 2.2 W max. 5 VA max.
- Dielectric withstanding:** 3 kV eff. 50Hz-1min. (IN/OUT/supply)
CAPv10 HI: 5kV eff. 50Hz-1min.
- Operating temperature:** -20 to +60°C
- Storage temperature:** -20 to +70°C
- Installation:** Pollution degree 2 / voltage surge II

Protection: housing/terminals: IP 20
Removable terminal blocks for screwed connectings (2.5 mm², flexible or rigid)
Weight: 290g (with packaging)
Self-extinguishing case of black UL 94VO PA66.
Mounting in cabinet: latching on symmetrical DIN rail.

Compliance with standards:

Electrical safety EN 61010-1
ATEX 2014/34/UE (area 2) EN 60079-0, EN 60079-15
Directive EMC 2014/30/UE EN 61326-1

Marking:

CE

Ex

II 3 G Ex nA IIC T4 Gc


Safeties

	Blinking of the voltage presence LED	Return value of the analog output
Self-diagnosis	2s / 2s	22mA for current output 0-20mA
Sensor break	0.5s / 0,5 s	0mA for output 4-20mA 11V for voltage output



The friendly interface

Dimensions

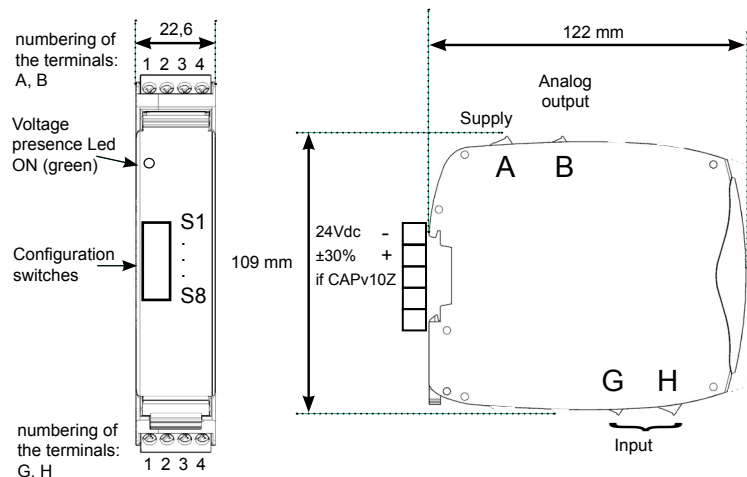

Outputs

- Average response time = 150 ms in standard (for a variation from 0 to 90% of the input signal)
- Option F: Faster response time:
< 5ms for the voltage or current inputs and < 8ms for the other inputs
- Response times guaranteed 10 min. after setting the converter on tension and 30 seconds after a revert from measure overrange or a sensor break.
- Temperature coefficient < 100 ppm de l'EM/°C

Type	Load impedance Lr in Ω	Caliber	Configuration of the micro-switches	
			S7	S8
Current active/passive	active: ≤ 600 passive: $\leq (U-2)/0,022$	0-20 mA		
		4-20 mA		•
Voltage	≥ 5000	0-10V	•	

• → Switch ON

Inputs

● → Switch ON

Type	Max. error	Measure range (MR)	Input impedance	Permanent overload	Caliber	Configuration of the micro switches										
						S1	S2	S3	S4	S5	S6					
V	±750mV	±300V	≥ 1MΩ	±600V	±270V		●		●	●	●					
	±450mV				±150V		●		●	●						
					0-270V		●		●	●						
	±25mV	±11V		±50V	0-150V		●		●	●						
	±15mV				±5V		●		●	●						
					±10V		●		●	●						
	±2.5mV	±1,1V			0-5V		●			●						
	±1.5mV				0-10V		●									
					±500mV			●	●							
mV	±250μv	±110mV	±1V	±1V			●		●	●						
	±150μv			0-500mV			●	●								
mA	±40μA	±22mA	Max. drop 0.9V	±100mA	0-1V			●		●	●					
	±30μA				±5mA			●	●							
					±10mA			●	●							
					±20mA			●	●							
					0-5mA				●	●						
					0-10mA				●	●						
		0-20mA							●	●						
Thermocouple J (standard IEC581)	±3.5°C	-50/1200°C	≥ 1MΩ	-	4-20mA						●					
					-50 to 200°C			●	●		●					
					0 to 100°C			●	●		●					
					0 to 200°C			●	●		●					
					0 to 400°C	●	●	●	●		●					
					0 to 600°C	●	●	●	●		●					
					0 to 800°C	●	●	●	●		●					
					0 to 1000°C	●	●	●	●		●					
					0 to 1200°C	●	●	●	●		●					
					Thermocouple K (standard IEC581)	±3.5°C	-50/1200°C	≥ 1MΩ	-	-50 to 200°C		●	●			
0 to 100°C		●	●													
0 to 200°C		●	●													
0 to 400°C		●	●							●	●					
0 to 600°C		●	●							●	●					
0 to 800°C		●	●							●	●					
0 to 1000°C		●	●							●	●					
0 to 1200°C		●	●							●	●					
Sensor Pt100 3 wire Standard IEC751 (DIN 43760) (line resistance <25Ω)	±0.5°C	-200/800°C	Current 250μA	-						-50 to 50°C	●					
	±0.7°C									-50 to 100°C	●					
					0 to 100°C	●					●	●				
					0 to 150°C	●					●	●				
					0 to 200°C	●										
					0 to 300°C	●				●		●				
					0 to 500°C	●				●	●					
					0 to 800°C	●				●	●	●				
					Sensor Pt100 4 wire Standard IEC751 (DIN 43760) (line resistance <25Ω)	±0.5°C	-50 to 50°C	●			●					
±0.7°C	-50 to 100°C	●				●			●							
	0 to 100°C	●				●			●							
	0 to 150°C	●				●		●	●							
	0 to 200°C	●				●		●								
	0 to 300°C	●				●		●	●							
Potentiometer 100Ω to 10kΩ	±0.2 of the MR	-	-	-		●	●									
	±0.5Ω	0/440Ω (4 wire)	-	-	0 to 100Ω	●	●				●					
±25Ω	0/10kΩ	0 to 200Ω			●	●				●	●					
		0 to 300Ω			●	●				●	●					
		0 to 400Ω			●	●			●		●					
		0 to 500Ω			●	●			●		●					
		0 to 1000Ω			●	●			●	●						
		0 to 5000Ω			●	●			●	●						
		0 to 10000Ω			●	●			●	●	●					


- Supply for 2-wire sensor: 24 Vdc ±15% (protection from short-circuits 30mA max)
- Measurable overrange: ±10% of the caliber
- Standard sampling time: 100ms (1ms if option F)
- Common mode rejection rate: 130 dB
- Serial mode rejection rate: 70 dB 50/60Hz
- Sensor break detection active for the inputs thermocouple, Pt100 and resistance < 440Ω

Coding


if bus supply version 24Vdc ±30% if electrical strength 5KV if option faster response time

Input of the power supply 24Vdc ±30%


Wiring

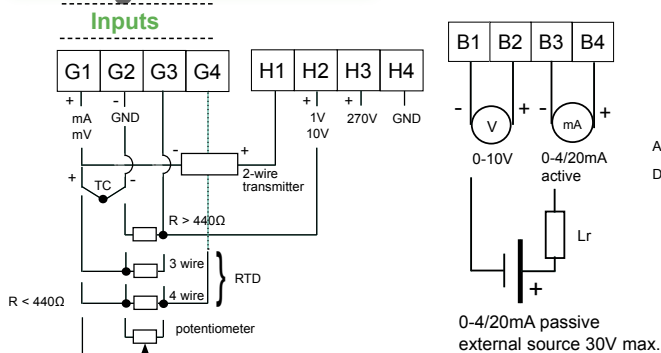

Supply



Max. supply current of the bus = 3.5A dc

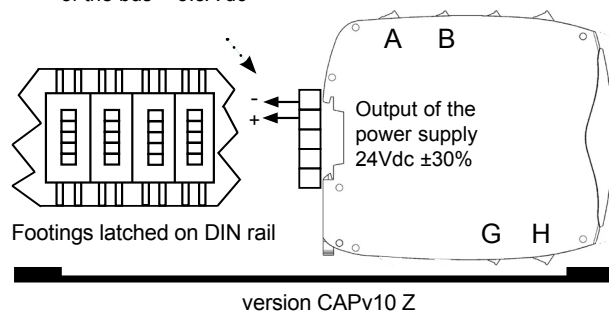

SFERE . Société Française d'Etudes et de Réalisations Electroniques

RCS Lyon 423-502-608 - Printed in France

Route de Brindas - Parc d'Activité d'Arbora - N°2
69510 SOUCIEU EN JARREST - FRANCE

Tél. : 04 78 16 04 04 Fax. : 04 78 16 04 05
Tel. Intern. : 33 4 78 16 04 04 Fax Intern. : 33 4 78 16 04 05

e-mail : info@sphere-net.com . http : //www.sphere-net.com

Your representative